

LFP 150-12 (LiFePO4)

12,8V / 150Ah

Cosmos Batteries: Safe Lithium Iron Phosphate (LFP) general purpose batteries with an automatic monitoring and protection by the built-in Battery Management System.

FEATURES:

- Longlasting power
- Intelligent built-in BMS (Battery Management System)
- Quick battery charging time
- Unique QR-coding on each battery
- Less weight then lead acid batteries
- Batteries don't require much servicing to prolong its service life
- The batteries can withstand extreme weather conditions and temperatures



Technical Specifications

Lithium Chemistry	: LiFePO4
Rated Nominal Voltage	: 12,8V
Nominal Capacity	: 150Ah
Nominal Rated Energy	: 1920 Wh
Design Life (Float Application)	: 15 yrs
Cycle Life (0.2C, 25°C)	: 6000* (*tested on cell level)
Overall Duty Efficiency	: 99,50%
Number of cells per block	: 4
- Number of strings per block	: 1
- Number of cells per string	: 4
Maximum Series Blocks	: 4
Maximum Parallel strings	: 4
Communications Protocols (if applicable)	: No (optional)
Heater installed	: No (optional)

Mechanical Specifications

Dimensions (L x W x H)	: 483x170x240 mm
Weight	: 15.9kg
Terminal Type	: M8
Terminal Torque Recommendation	: 12.4 Nm
Case Material	: ABS
IP Class	: IP50

Charging Information

See also BMS Parameters

Charging Voltage Range	: 14.6~14.8V
Float Voltage Range	: 13.6~13.8V
Max. constant current	: 150A

Discharging Information

See also BMS Parameters

Cut-off Voltage	: 8.8V
Max. constant current	: 150A
Max. peak current	: 650A

Storage/Operating Temperatures

See also BMS Parameters


Storage	: -20~45 °C
Discharge	: -23~65 °C
Charge	: -3~65 °C

APPLICATIONS:

- Telecom
- Stand-By
- Energy Storage
- Light scooters
- Patient Lifts
- Small Industrial Applications
- RV's / Leisure
- Boats / Nautical
- All light cyclic applications

SAFETY STANDARD:

- UN38.3

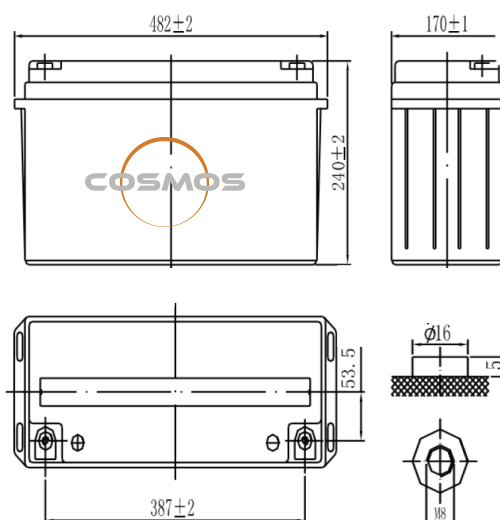

LFP 150-12 (LiFePO4)

12,8V / 150Ah




BMS PARAMETERS


NO.	Type		Function	Setting Value	Remarks
				Model	
1	Voltage	Charge	Cell Voltage Protection	3.9V Protection	Recover at 3.55V
2			Total Voltage Protection	15.6V Protection	Recover at 14.2V
3		Discharge	Cell Voltage Protection	2.0V Protection	Recover at 2.7V
4			Total Voltage Protection	8.0V Protection	Recover at 10.8V
5	Current	Charge	Normal	$\leq 150A$	-
6			Over Current Protection 1	150A	Delay 10s, recovery in every 1 min
7			Over Current Protection 2	-	-
8		Discharge	Normal	$\leq 150A$	-
9			Over Current Protection 1	600A	Delay 30s, recovery in every 1 min
10			Over Current Protection 2	-	-
11			Short Circuit Protection	$\geq 1800A$	Delay 1ms
12					
12	Temp	Cell Temp 1	Low Temp Protection	Charging $\leq 0^{\circ}C$ Discharging $\leq -20^{\circ}C$	Delay 1 ~ 2s
13		Cell Temp 2	High Temp Protection	Charging $\geq 70^{\circ}C$ Discharging $\geq 75^{\circ}C$	Delay 1 ~ 2s
14		PCB	Range	$\geq 95^{\circ}C$	Recovery at $75^{\circ}C$

STATE OF CHARGE

Different DOD Discharge Cycle Life Curve 1C 25C

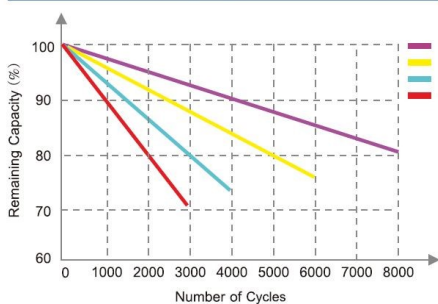

Different Temperature Discharge Curve(0.2C)

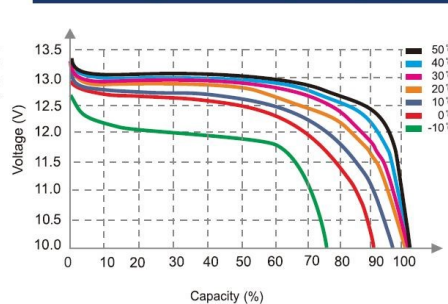

State of Charge Curve(0.5C, 25°C)

